



Printed Pages : 7

TME – 201

(Following Paper ID and Roll No. to be filled in your Answer Book)

**PAPER ID : 4039**

Roll No.

## B. Tech.

(SEM. II) EXAMINATION, 2006-07

### MECHANICAL ENGINEERING

*Time : 3 Hours]*

*[Total Marks : 100*

- Note :*
- (1) Answer all questions.*
  - (2) Use of steam table and Mollier's chart is permitted.*
  - (3) Assume missing data if any.*

**1** Attempt any **four** parts of the following : **4×5=20**

- a) Explain the concept of continuum, with suitable examples.
- b) A closed system whose initial volume is **50 x 10<sup>4</sup> cc** undergoes a non-flow reversible process for which pressure and volume correlation is given by

**$P=(8-4V)$**  where **p** in bar and **V** in **m<sup>3</sup>**  
if **200 kJ** of work is supplied to the system.

Determine

- i. final process
- ii. final volume after the completion of process.

- c) Steam enters into a steam turbine with a velocity of **30 m/s** and enthalpy of **2610kJ/kg** and leaves with a velocity of **10m/s** and enthalpy of **2050 kJ/kg**. Heat is lost to the surrounding due to temperature, difference is **280 kJ/min** and steam consumption rate of the turbine is **6000 kg/hr**. Stating your assumptions calculate the power developed by the steam turbine.
- d) Which is more effective way to increase the efficiency of a reversible heat engine (i) to increase the source temperature  $T_1$  while sink temperature  $T_2$  kept constant or (ii) to decrease the sink temperature by the same amount while source temperature in constant.
- e) What is entropy? When entropy is defined only in terms of reversible process, how can then it be evaluated for an irressible process ?
- f) A metal block of **5 kg** and **200° C** is cooled in a surrounding of air which is at **30° C**. If specific heat of metal is **0.4 kJ/kgK** calculate the following:-
- entropy change of block
  - entropy change of surrounding & universe.

2. Attempt any **two** parts : **10×2=20**


- a) i) With the help of neat sketches explain the working of a **4** stroke **SI** engine.

- ii) With the help of FS diagrams, explain as to how the Rankine cycle overcomes the limitations of comet vapour cycle for steam turbine power plant.
- b) For a steam power plant following observation was made:-  
 Supply condition of steam : **60 bar 450°C**  
 Condenser pressure : **0.10 bar**  
 Steam flow rate : **5000 kg/hr.**  
 Calculate the following:-
- i) Turbine work
  - ii) % of pump work compared to turbine work
  - iii) Heat addition in boiler
  - iv) Heat rejection in condenser
  - v) Thermal efficiency.
- c) An engine working on diesel cycle has air intake condition of **1 bar** and **310° k** and compression ratio is **17**. Heat added at pressure is **1250 kJ/kg**. Make calculation for the maximum temperature of the cycle, net power output and thermal efficiency of the cycle.

**3** Attempt any **two** parts of the following: **10×2=20**

- a) Explain the followings:
  - i) Necessary and sufficient conditions of equilibrium of a system of coplanar concurrent forces.

- ii) Concept of free body diagram with the help of suitable examples.
  - iii) Angle of repose and its applications
  - iv) Belt friction and its applications.
- b) A plate measuring  $(4 \times 4)\text{m}^2$  is acted upon by 5 forces in its plane as shown in **fig.1**. Determine the magnitude and direction of the resultant force.

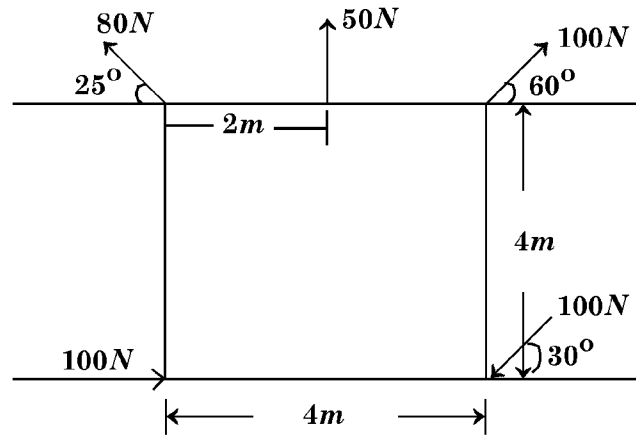


**Fig. 1**

- c) A ladder 3 m long and weighing 250 N is placed against a wall with end **B** at floor level and **A** on the wall. In addition to self weight, the ladder supports a man weighing 1200 N at 2.5 m from **B** on the ladder. If co-efficient of friction at wall is 0.25 and at floor is 0.35 and if ladder makes an angle 60° with the floor, find the minimum horizontal force which if applied at **B** will prevent the slipping of the ladder.


4 Attempt any **two** parts : **10×2=20**

- a) i) Define and differentiate between a perfect, deficient and redundant truss.
- ii) Derive the relationship between shear force, bending moment and the loading for a beam. What are the assumptions required for this derivation?
- b) Determine the magnitude and nature of forces with the members of truss shown in **fig. 2**.

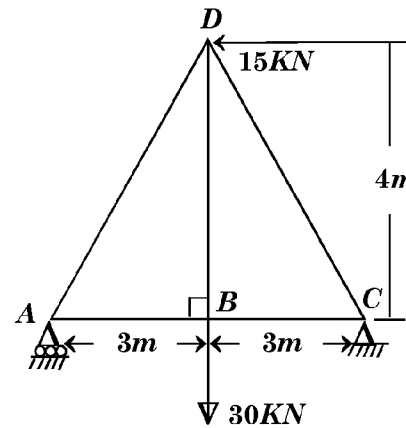

**Fig. 2**


- c) Draw the SF and B.M Diagram for the beam shown in **fig.3**.

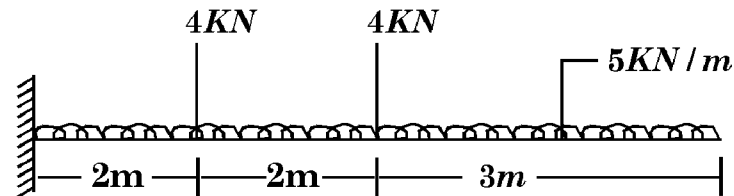

**Fig. 3**


5 Attempt any **four** parts of the following : **5×4=20**

- a) Draw stress-strain curve for a ductile and brittle material on a simple diagram. What are the differences between these two curves.
- b) Determine the stress in all the three sections and total deformation of the steel rod shown in **Fig.4**. Cross sectional area = **10cm<sup>2</sup>**, **E=200 GN/m<sup>2</sup>**

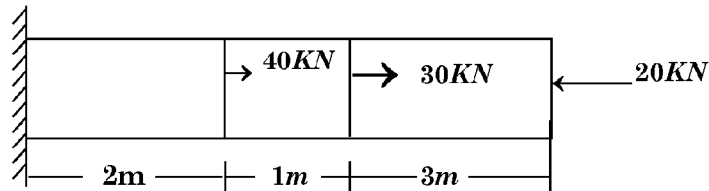

**Fig. 4**

- c) Calculate the normal and shear stress on the plane inclined at an angle **60°** for the stress shown in **fig.5**. Also calculate the value of principal stress and its location.

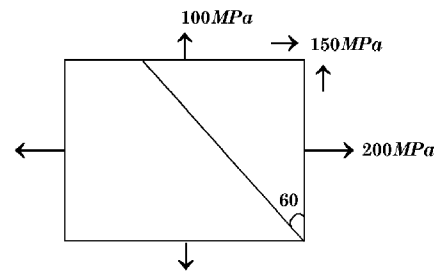

**Fig. 5**

- d) Derive the torsion formula.

$$\frac{T}{J} = \frac{\tau}{r} = \frac{G\theta}{L}$$

Enumerate the assumptions that are made in deriving this formula.

- e) Determine the dimensions of a simply supported rectangular steel beam 6m long to carry a brick wall **250 mm** thick and **3 m** high, if the brick work weights **19.2 kN/m<sup>3</sup>** and maximum permissible bending stress is **800 N/cm<sup>2</sup>**. The depth of beam is **3/2** times its width.
- f) A solid circular shaft transmits **75 kW** power at **180 rpm**. Calculate the shaft diameter if the twist in the shaft is not to exceed **1** degree in **2 m** length and shear stress is limited to **50MN/m<sup>2</sup>**. Take modulus of rigidity **G = 100GN/m<sup>2</sup>**.