


**B.TECH.****THEORY EXAMINATION (SEM-IV) 2016-17****STRUCTURAL ANALYSIS-I****Time : 3 Hours****Max. Marks : 100****Note : Be precise in your answer. In case of numerical problem assume data wherever not provided.****SECTION – A****1. Attempt the following:****10 x 2 = 20**

- (a) Give an example of a structure where it is externally as well as internally indeterminate?
- (b) Which method of analysis is suitable, if static indeterminacy is more than kinematic indeterminacy?
- (c) What are the uses of influence lines?
- (d) Distinguish between influence line diagram and bending moment diagram.
- (e) Classify the arches based on materials, shapes and structural systems?
- (f) Why arches are preferred than beams?
- (g) Write the formulae for area the centroid of the curve defined by  $y = kx^n$ .
- (h) What is the advantage of conjugate beam method over other method?
- (i) State Castigliano's first theorem?
- (j) Write the equation in term of strain energy, which is sufficient to determine the stress in case of propped cantilever beams?

**SECTION – B****2. Attempt any five parts of the following questions:****5 x 10 = 50**

- (a) A simply supported beam has a span of 25m. Draw the influence line for shearing force at a section 10m from one end and using this diagram determine the maximum shearing force due to the passage of a point load 5kN followed immediately by uniformly distributed load of  $2.4\text{kN/m}^2$  extending over a length of 5m?
- (b) An uniformly distributed load of  $40\text{kN/m}$  and of length 3 metres transverse across the span of simply supported length of 18 metres. Compute the maximum bending moment at 4m from the left support and absolute bending moment.
- (c) A three hinged parabolic arch hinged at the supports and at the crown has a span of 24m and a central rise of 4m. It carries concentrated load of 50kN at 18m from the left support and udl of  $30\text{kN/m}$  over the left portion. Determine the normal thrust, radial shear at a section 6 metre from the left hand support.
- (d) Find the slope and deflection at the free end of a cantilever shown in figure by moment area method. Moment area of AC is twice the inertia of BC.

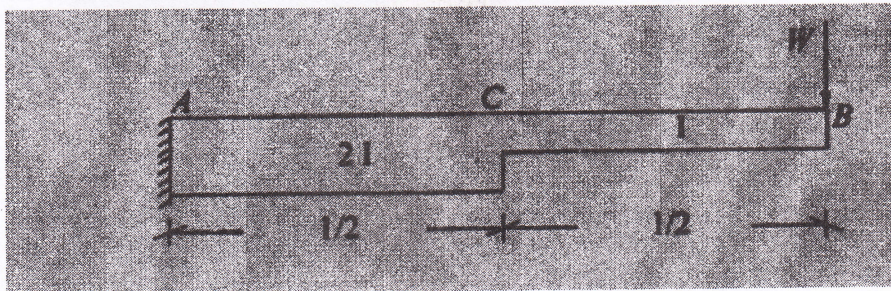

- (e) A beam ABCDE is 12m long and supports a load of 100kN at C, simply supported at A and E. Portions  $AB=BC=CD=DE=3\text{M}$ . Moment of inertia is I in the portion AB and DE

and  $2I$  in the portion  $BD$ . Determine the deflections at  $B$  and  $C$  by using conjugate beam method.


- (f) A cantilever beam is of span  $2\text{m}$  and is subjected to a concentrated load of  $20\text{kN}$  at the free end. The cross section of the beam is  $100 \times 200\text{mm}$  and  $E=30\text{kN/mm}^2$ . Calculate the slope and deflection of the beam at midspan. Use unit load method.
- (g) State and prove that the Castigliano's theorem.
- (h) (i) Define fatigue  
 (ii) What is the polar moment of inertia?  
 (iii) What is unsymmetrical bending?  
 (iv) What are the reasons for unsymmetrical bending occurring in the beams?

### SECTION - C


Attempt any two of the following questions:

$2 \times 15 = 30$


3. (a) A simply supported beam with variable moment of inertia supports a uniformly distributed load of  $w \text{ kN/m}$ . Estimate the maximum deflection in a beam.

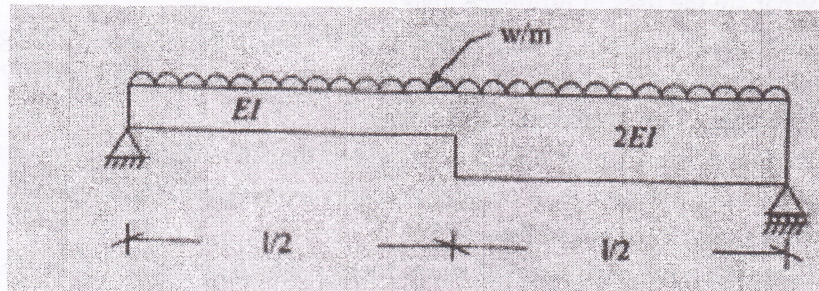


- (b) Determine the slopes at supports and deflection under the load for the beam shown in figure. Take young's modulus  $E$  as  $210\text{GPa}$ , moment of inertia as  $120 \times 10^6 \text{ mm}^4$ . Adopt conjugate beam method.

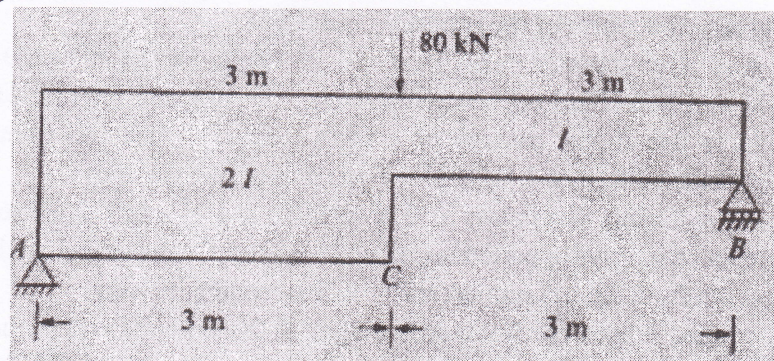

4. (a) Calculate the deflection under the load for truss shown in figure. All the members are have equal areas of  $1250\text{mm}^2$  in cross-section and  $E=200\text{kN/m}^2$ .

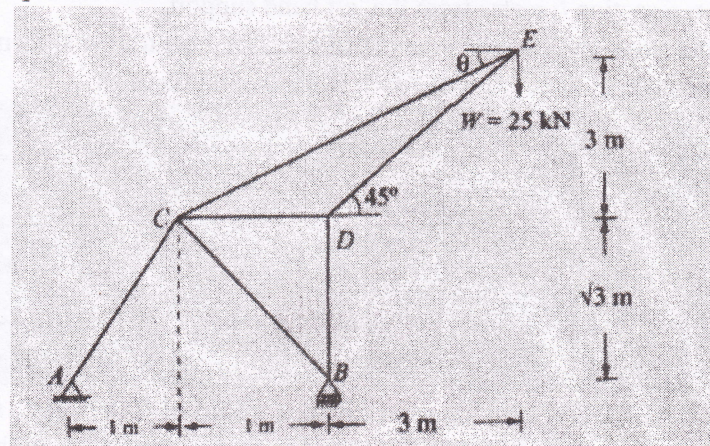

- (b) A three hinged parabolic arch is shown in figure. Determine the normal thrust, radial shear and bending moment at quarter span and draw BMD.

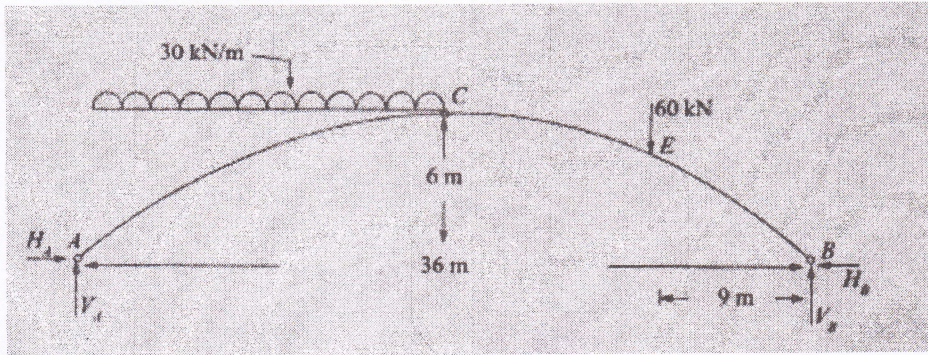

5. Figure shows a frame subjected to a load of 3.4kN. find the resultant stress at A and B.

