

(Following Paper ID and Roll No. to be filled in your Answer Book)

PAPER ID : 2047

Roll No.

--	--	--	--	--	--	--	--	--	--

B.Tech.**(SEM. III) ODD SEMESTER THEORY EXAMINATION****2010-11****BASIC SYSTEM ANALYSIS***Time : 3 Hours**Total Marks : 100***Note :** (1) Attempt all the questions.

(2) Each question carries equal marks.


1. Attempt any **four** parts of the following : **(5×4=20)**(a) What is a signal ? How signals are classified ? **5**(b) Differentiate periodic and non-periodic signals with suitable examples. **5**(c) Express the triangular waveform shown in Fig.1 using ramp functions. **5**

Fig.1.

(d) What is an analogous system ? Discuss. **5**(e) What are the electrical elements analogous to the mechanical translational elements ? How they are analogous ? Explain. **5**

- (f) Draw the **analogous** electrical circuit of the given mechanical system shown in Fig.2. Use f-v analogy. Write the system equations. 5




Fig.2

2. Attempt any **four** parts of the following : (5×4=20)

- (a) Explain exponential form of Fourier series. 5
 (b) Discuss waveform symmetry with suitable examples. 5
 (c) Determine the trigonometric Fourier series of the waveform shown in Fig.3. 5

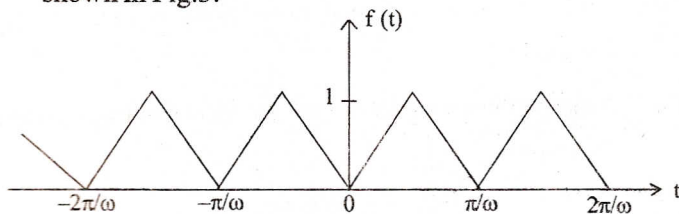


Fig. 3

- (d) Determine the output voltage response across the capacitor to a current-source excitation $i(t)=e^{-t}u(t)$, as shown in Fig.4. 5

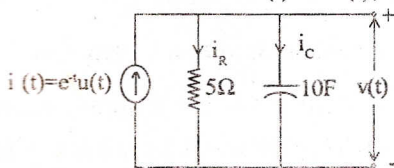


Fig. 4

(e) Find the Laplace transform of function : 5

$$f(t) = t \text{ for } 0 < t < 1$$

$$= 0 \text{ for } t > 1$$

(f) What do you understand by the terms — state, state space, state variables and state vector ? 5

3. Attempt any **two** parts of the following : (10×2=20)

(a) For the circuit shown in Fig.5 determine the current when the switch is moved from position 1 to position 2 at $t = 0$. The switch has been in position 1 for a long time to get steady state value : 10

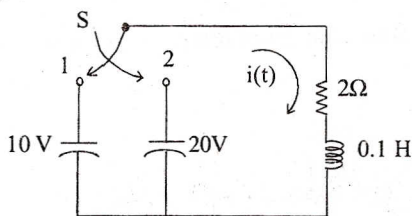


Fig. 5

(b) For the circuit shown in Fig.6, with $R = 1\Omega$, $C = 1F$, and $v_c(0) = 0V$. Determine output response $v(t)$ when input $i(t)$ is -

(i) impulse function

(ii) unit-step function. 10

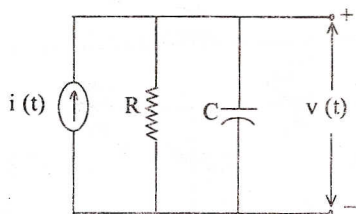


Fig. 6

- (c) Synthesize and find the Laplace transform of the following waveforms : 10

- (i) Gate function of Fig.7(a)
 (ii) Half cycle sine wave of Fig.7(b).

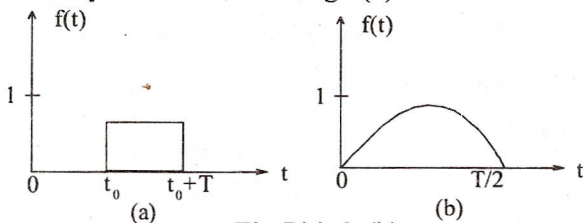


Fig.7(a) & (b)

4. Attempt any **two** parts of the following : (10×2=20)

- (a) What is state transition matrix ? A system matrix is given by :

$$A = \begin{bmatrix} -1/2 & -5/2 \\ 1/2 & -7/5 \end{bmatrix}$$

Obtain the state transition matrix. 10

- (b) Obtain the state-space representation for the systems described by the following differential equations :

(i) $\ddot{y} + 7\dot{y} + 14y = 6u$

(ii) $\ddot{y} + 4\dot{y} + 5y = u$ 10

- (c) Obtain the state variable formulation of bridge network shown in Fig.8. 10

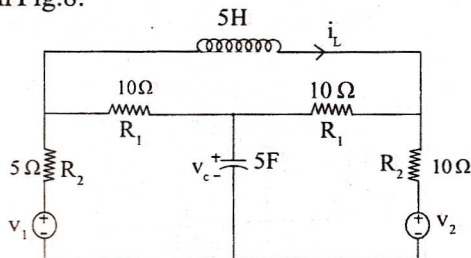


Fig. 8

5. Attempt any two parts of the following : (10×2=20)

(a) Find the inverse Z-transform of the following functions :

(i)
$$F(z) = \frac{2z+1}{(z-0.1)^2}$$

(ii)
$$F(z) = \frac{2z}{z^2 - 1.2z + 0.5}$$
 10

(b) Derive Z-transforms of exponential function, and sine and cosine functions. 10

(c) Solve the following difference equation using the Z-transform method :

$$x(k+2) + 5x(k+1) + 6x(k) = 0$$

$$x(0) = 0, \quad x(1) = 1.$$

Discuss the significance of the difference equation. 10