

Paper Id: **120323**Roll No:

--	--	--	--	--	--	--	--	--	--	--

B TECH
(SEM-III) THEORY EXAMINATION 2019-20
BASIC SIGNALS & SYSTEMS

Time: 3 Hours

Total Marks: 100

Note: 1. Attempt all Sections. If require any missing data; then choose suitably.

SECTION A

1. Attempt all questions in brief.

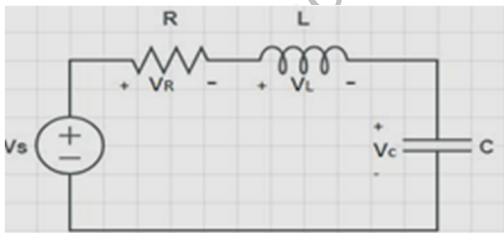
2 x 10 = 20

Qno.	Question	Marks	C O
a.	Define signal. What are various types of signals?	2	1
b.	Differentiate between Invertible and Non-Invertible system.	2	1
c.	State and explain sampling theorem.	2	2
d.	State and prove time shifting property of Fourier Series.	2	2
e.	Deduce inverse laplace transform of $1/s(s+4)$.	2	3
f.	Drive Laplace transform of $\sin\omega t$.	2	3
g.	What is the significance of state variable?	2	4
h.	What is the condition for the stability of a system?	2	4
i.	Drive time reversal property of z-transform.	2	5
j.	Find the z transform of $f(nT) = e^{-anT}$; $a > 0, n \geq 0$	2	5

SECTION B

2. Attempt any three of the following:

10X3=30

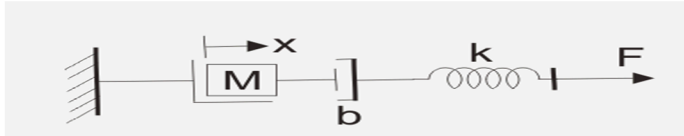
Qno.	Question	Marks	CO
a.	find even and odd component of the following signals (i) $x(t) = \cos t + \sin t + \cos t \sin t$ (ii) $x(n) = \{1, 2, 1, 4, 5, 0, 3\}$ ↑	10	1
b.	Obtain the trigonometric Fourier series for the half wave rectified sine wave.	10	2
c.	Calculate the Laplace transform for the function $F(t) = e^{-at} \sinh bt$.	10	3
d.	Obtain the state model for the electric network shown in figure. Select i_L and V_c as state variables. 	10	4
e.	State and prove the time delay theorem and Parsavel's theorem of Z-transform.	10	5

Paper Id: 120323

Roll No:

SECTION C

3. Attempt any *one* part of the following: 10X1=10

Qno.	Question	Marks	CO
a.	Sketch the function (i) $x(t)=u(t)+2u(t)+3u(t-4)-u(t-5)$ (ii) $x(t)=r(t+1)-r(t)+r(t-2)$	10	1
b.	Obtain F-V and F-I analogous system of mechanical system shown in figure. 	10	1

4. Attempt any *one* part of the following: 10X1=10

Qno.	Question	Marks	CO
a.	Explain the trigonometric and exponential form of Fourier series representation of periodic signal. Find the Fourier transform of given signal shown in fig.	10	2
b.	State and prove duality property of Fourier transform. Find the inverse fourier transform of, $X(j\omega) = \begin{cases} 2\cos\omega, & \omega < \pi \\ 0, & \omega > \pi \end{cases}$	10	2

5. Attempt any *one* part of the following: 10X1=10

Qno.	Question	Marks	CO
a.	For a transfer function $H(s) = (s+10)/(s^2 + 3s + 2)$. Find the response due to input $x(t) = \sin 2(t) u(t)$.	10	3
b.	Find the inverse Laplace transform of given function by using convolution theorem (i) $x(s) = 1/(s^2+a^2)^2$ (ii) $x(s) = s/(s+1)(s+2)$	10	3

6. Attempt any *one* part of the following: 10X1=10

Qno.	Question	Marks	CO
a.	Consider the state equation shown below. $\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \end{bmatrix} = \begin{bmatrix} 0 & 1 \\ -2 & -3 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} + \begin{bmatrix} 0 \\ 1 \end{bmatrix} u$ Determine the state transition equation $x(t)$ when the input is unit step and $x_1(0)=1, x_2(0)=2$.	10	4
b.	Explain state transition matrix, its physical significance and properties.	10	4

Paper Id: **120323**Roll No: 7. Attempt any *one* part of the following:

10X1=10

Qno.	Question	Marks	CO
a.	<p>State and prove time shifting property of Z-transform. Also find the inverse Z-transform of given function using convolution theorem.</p> $x_1(z) = \frac{1}{1-az^{-1}}, ROC : [z] > [a]$ $x_2(z) = \frac{1}{1-z^{-1}}, ROC : [z] > [1]$	10	5
b.	<p>For the discrete system described by the difference equation $y(n) = 0.6y(n-1) - 0.08y(n-2) + x(n)$. Determine:</p> <p>(i) The unit sample response sequence, $h(n)$,</p> <p>(ii) The step response.</p>	10	5

RAJESH KUMAR TEWARI

/ 10-Dec-2019 09:02:30 | 139.5.198.30