


**B.TECH**  
**(SEM VIII) THEORY EXAMINATION 2018-19**  
**EARTHQUAKE RESISTANT DESIGN OF STRUCTURES**

**Time: 3 Hours****Total Marks: 100****Note: 1.** Attempt all Sections. If require any missing data; then choose suitably.**SECTION A****1. Attempt all questions in brief.****2 x10=20**

- a. Define earthquake resistant design philosophies.
- b. What factors of earthquake forces in a structure ?
- c. Define isoseismals of an earthquake.
- d. What are the dynamic behavior of soil?
- e. Define radiation damping.
- f. List out methods of modeling soil.
- g. Define spring models.
- h. Write spring models limitation.
- i. Define lap splices.
- j. Define restrotation.

**SECTION B****2. Attempt any three of the following:****10x3=30**

- a. Describe types and characteristics of typical dynamic loading with examples and essential characteristics of dynamic problem.
- b. What are the plate tectonics and how they are related to continental drift and sea floor spreading.
- c. Consider a two storied structure shown in figure . Let the system be given free vibration by giving an initial displacement of 10 cm to the top story. Find  $x_1$  and  $x_2$ .

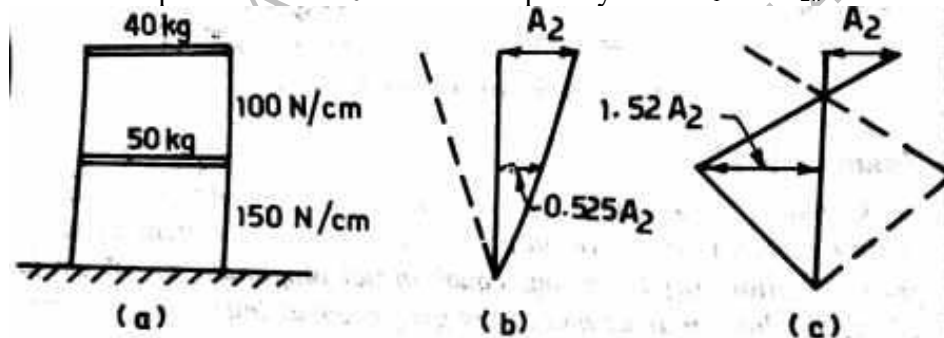

- d. What is response spectra and explain the importance of seismic design of a structure ?
- e. Describe the development of mass spring dashpot model from elastic half space theory.

**SECTION C****3. Attempt any one part of the following:**

- a. Describe effects of earthquake. and also define moment magnitude.
- b. Distinguish between the following (a) Body ways and surface ways (b) lithosphere and asthenosphere.


**4. Attempt any one part of the following:**

- a. An SDOF system consist of a mass with weight of 175 kg and a spring costant  $k=530$  kN/m . While testing the system a relative velocity of 30 cm/s was observed on application of a force of 450 N. Determine the damping ratio, damped frequency of vibration, logarithmic decrement, and the ratio of two consecutive amplitudes.

- b. Derive a mathematical expression defining the dynamic displacements using d'Alembert's principle.

**5. Attempt any one part of the following:**

- a. Describe the various earthquake –resistant features that can be introduced in a masonry building to make it earthquake resistant.
- b. The plan and elevation of a three – storied RCC building shown in figure . the building is located in seismic zone V. The type of soil encountered is medium stiff and is proposed to design the building with a special moment –resisting frame. The intensity of DL is  $10 \text{ kN/m}^2$  and the floors are to cater to an IL of  $3\text{kN/m}^2$ . Determine the design seismic loads on the structure by static analysis.

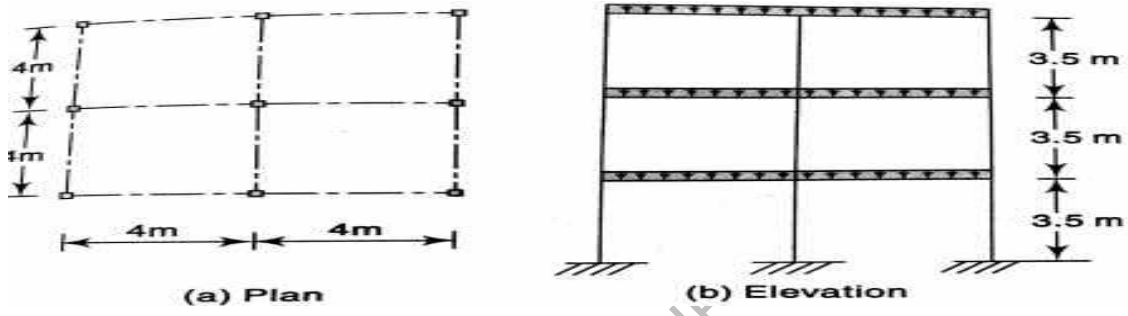

**6. Attempt any one part of the following:**

- a. Determine the frequency and design seismic coefficient for an ordinary masonry shear wall in a school building at Allahabad. For the given following data . Roof load  $P=15 \text{ kN/m}$ , Height of wall  $h=3.0 \text{ m}$  , Width of wall  $b=0.2 \text{ m}$  . Unit weight of wall  $w =19.2 \text{ kN/m}^2$ , soil is medium.
- b. Define bands. At what levels in a masonry building would you provide them? Give justifications for each of them

**7. Attempt any one part of the following:**

- a. Starting from fundamentals derive the expression for natural frequencies and amplitudes for block foundation subjected to horizontal forces  $F_x \sin \omega t$  and a moment  $M_y \sin \omega t$  at the combined center of gravity of machine and foundation.
- b. Determine the lateral forces on a two-storey unreinforced brick masonry building as shown in figure sustained near Zone III for following data . Plan size  $=18\text{m} \times 8\text{m}$  , total height of building  $=6.2 \text{ m}$  , storey height  $=3.1 \text{ m}$  , weight of roof  $=2.5\text{kN/m}^2$ , weight of wall  $=5 \text{ kN/m}^2$ , live load on roof  $=0$ , live load at floor  $=1.0 \text{ kN/m}^2$ , Zone factor  $=1.0$ , importance factor  $=1.0$  , Response reduction factor  $=1.5$ , soil (Type III) medium soil.

